




HSX211SL SERIES

SEAM SEALING PACKAGE

☑ RoHS Compliant ☑ Pb Free


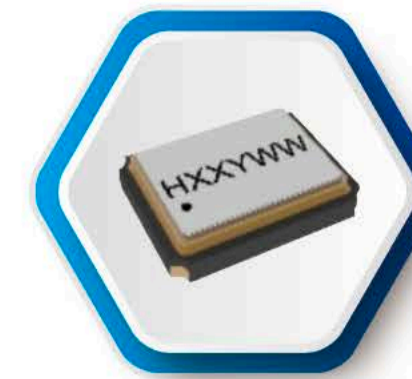


STANDARD SPECIFICATION


Items	Parameter
Frequency Range	24~48MHz
Mode	Fundamental
Frequency Tolerance (at.25°C)	±10ppm
Load Capacitance	7pF Min.
Drive Level	10μW (300μW Max.)
Equivalent Series Resistance	80Ω Max.
Storage Temp. Range	-55 ~ +125°C

DIMENSION

Unit:mm

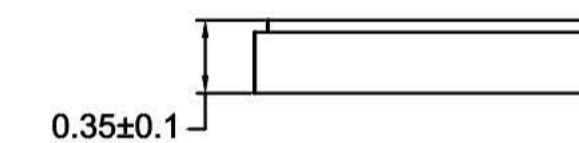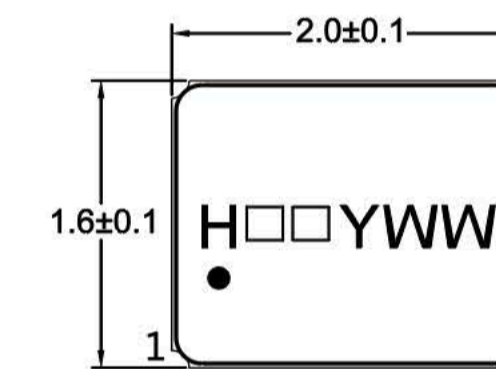


Bottom View

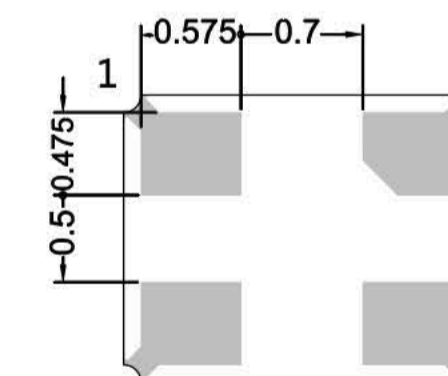


Pin Connections	
#1	Crystal
#2	GND/Lid
#3	Crystal
#4	GND/Lid

Internal Connection (Top View)

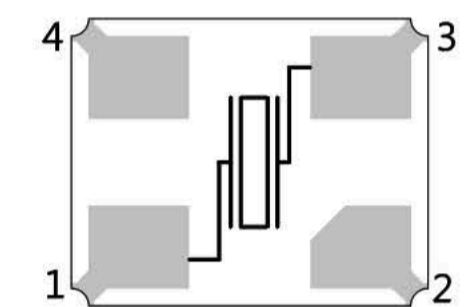

Recommended Land Pattern Tolerance: ±0.1

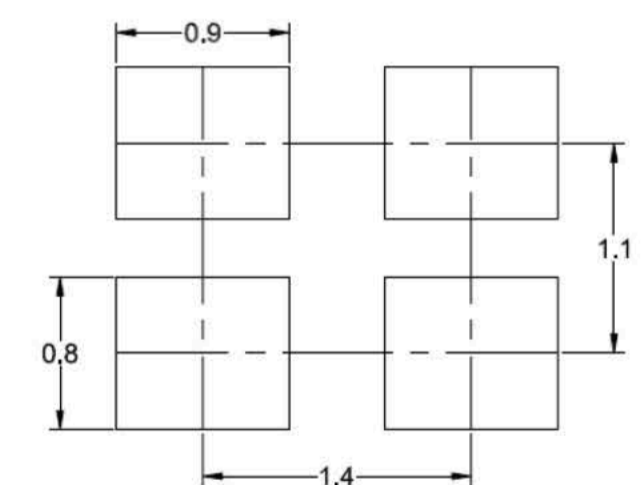

FREQUENCY STABILITY OVER OPERATING TEMPERATURE RANGE

Operating Temperature	Stability
-30 ~ +85°C	±10 ppm
-40 ~ +105°C	±20 ppm
-40 ~ +125°C	±40 ppm

*For other specification, please contact us.

Packing Unit : 3,000pcs/Reel.

Actual Size □