




HSX321G Series-3.2mm x 2.5mm CRYSTAL RESONATOR, GLASS SEALING PACKAGE

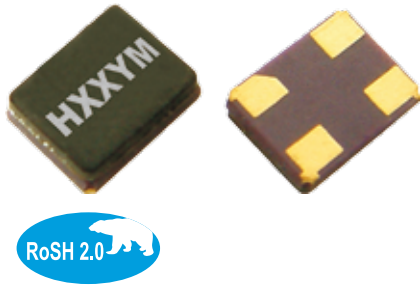

Features:

- Mainstream miniature SMD type with a mature industry production history, current usage spreads over a wide range of applications.
- High precision and reliability with excellent heat resistance.
- Common solution for non-RF applications, gaming devices, and other consumer-based mobile products.

STANDARD SPECIFICATION:

ITEMS	PARAMETER			
	10MHz	12 ~ 20MHz	20 ~ 28MHz	28 ~ 54MHz
Frequency Range	10MHz	12 ~ 20MHz	20 ~ 28MHz	28 ~ 54MHz
Mode	Fundamental			
Frequency Tolerance	±10ppm ~ ±50ppm (at. 25°C)			
Frequency Stability over Operating Temperature Range	±10ppm, ±15ppm, ±20ppm, or Specify			
Operating Temperature	-20 ~ +75°C , or Specify			
Load Capacitance	Series, 8pF, 10pF, 12pF, or Specify			
Drive Level	10µW (300µW Max.)			
Equivalent Series Resistance	120ΩMax.	80ΩMax.	60ΩMax.	50ΩMax.
Storage Temp. Range	-40 ~ +125°C			

Packing Unit : 3,000pcs/Reel.

DIMENSION

Unit: mm

