



HSX1210A SERIES

SEAM SEALING PACKAGE

☑RoHS Compliant ☑Pb Free



STANDARD SPECIFICATION


Items	Parameter
Nominal Frequency	26~96MHz
Mode	Fundamental
Frequency Tolerance (at. to 25 °C)	±10ppm , ±20ppm , or Specify
Frequency Stability (Temp.)	±10ppm , ±20ppm , or Specify
Operating Temp. Range	-30~+85 °C
Load Capacitance	7pF Min.
Drive Level	10μW (100μW Max.)
Equivalent Series Resistance	150Ω Max.
Storage Temp. Range	-40~+85 °C

*For other specification, please contact us.

Packing Unit : 3,000pcs/Reel.


DIMENSION

Unit:mm

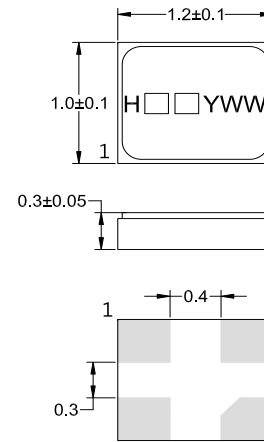

Pin Connections	
#1	Crystal
#2	GND/Lid
#3	Crystal
#4	NC

Internal Connection (Top View)



Recommended Land Pattern Tolerance:±0.1

